


DRILLS FOR CONCRETE - SHANK TYPE SDS PLUS with hit-cutting action

APPLICATION

For drilling into: concrete, natural stone, granite, bricks, masonry and marble.

TECHNICAL DATA

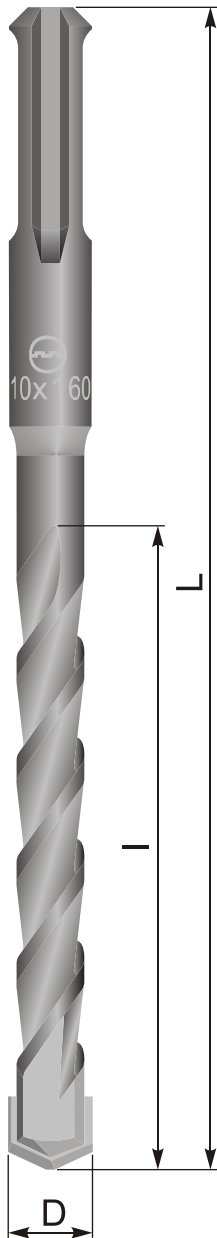

Material of the drill		34CrNiMo6 (1.6582)			
Material of the plate		BK8, BK11			
Point angle of the plate		130° ± 3°			
Geometrical parameters		OH - 04 704 64 - 87			
Overall dimensions, mm					
D		L		I	
nominal	tolerance	nominal	tolerance	nominal	tolerance
5	+0,40	110	+2,2	50	-1,6
6	+0,20				
7	+0,45 +0,25	160	+2,5	100	-2,2
8		210	+2,9	150	-2,5
9					
10	+0,50 +0,25	160	+2,5	100	-2,2
11		210	+2,9	150	-2,5
12				141	
13		+0,50 +0,25	160	+2,5	91
14	210		+2,9	141	-2,5
15				191	-2,9
16	+0,5	210	±2,0	150	±2,0
17				200	
18		250			
19		150			
20	+0,55	260	±3,0	200	±2,0
21		300			
22		200			
23	+0,55	260	±2,0	300	±2,0
24		200			
25	+0,55	260	±2,0	300	±2,0
26		360		±3,0	