


## DRILL FOR CONCRETE WITH CYLINDRICAL SHANK with cutting and hit-cutting action

### APPLICATION

For drilling into: concrete, natural stone, granite, bricks, masonry and marble.

### TECHNICAL DATA

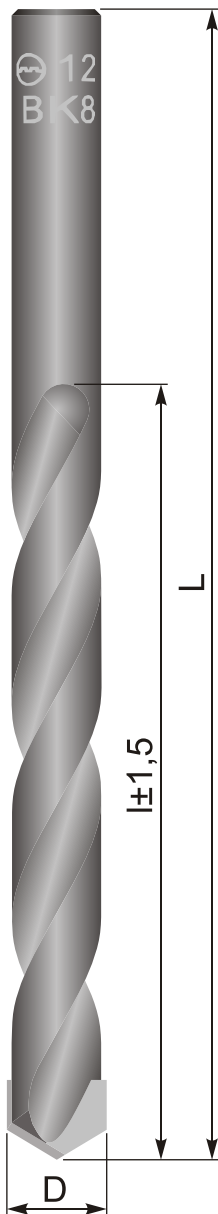

<b>Material of the drill</b>		34CrNiMo6 (1.6582)		
<b>Material of the plate</b>		BK8, BK11		
<b>Point angle of the plate</b>		130°±2°		
<b>Geometrical parameters</b>		OH - 04 704 64 - 87		
<b>Overall dimensions, mm</b>				
<b>D</b>		<b>L</b>		<b>I</b>
nominal	tolerance	nominal	tolerance	
5	+0,40	85	±1,5	50
6	+0,20	100		60
7	+0,45	120		80
8			+0,25	
9	+0,50	150		±2
10				
11	+0,25	150	±2	90
12				
13	+0,25	150	±2	90
14				

### OPERATING CONDITIONS

<b>Materials</b>	<b>min.<sup>-1</sup></b>
Concrete	1000
Natural stone	800 - 1000
Granite	500 - 800
Bricks	1000
Masonry	1000
Marble	500